

MEGA BAG SAFETY



MEGA BAG SAFETY AND USE INSTRUCTIONS:

DISCLAIMER

Checkmate Mega Bags are made from the highest quality materials and are very reliable. However, Checkmate can accept no liability for death or injury or damage to property which may result from the improper or incorrect use of its products.

If a bag is inflated to more than the recommended pressures below there is a risk of serious injury or death.

Checkmate Mega Bags are designed to give the maximum protection to cargo while also being light, durable and convenient to handle.

SAFETY

- ▶ The bags must not be used by any person who is unfamiliar with these safety instructions.
- ▶ The maximum inflation pressure is 0.4 bar (41kPa or 6 psi).
- ▶ When inflating the bag, the pressure must be monitored continuously by the operative.
- ▶ Do not stand over or in front of the valve while inflating.
- ▶ The bag must not be left unattended when connected to an airline or compressor.
- ▶ The airbag must not be used for lifting or jacking.
- ▶ Eye protection should be worn.

BEST PRACTICE

- ▶ The maximum gap in which the bag should be employed is 30cms, the red section on the top of the bag should be used as a guide.
- ▶ If the void to be filled is more than this, then the cargo must be stowed to achieve two or more smaller gaps.
- ▶ Insert airbags fully into the gap to avoid any part of the airbag protruding.
- ▶ If cargo is fragile, take care not to use excessive pressure which may damage the cargo.
- ▶ Use Checkmate inflation tool.



- ▶ With Checkmate Mega Bag adaptor.
- ▶ Ensure all the voids in the top tier of cargo are fully air bagged.



Checkmate Flexible Engineering Ltd

Unit 6, Pegasus Way, Bowerhill, Melksham, Wiltshire SN12 6TR, UK. Tel: +44 (0) 1225 705 465
email: sales@checkmateflex.com www.checkmateflex.com



www.checkmateflex.com



MEGA BAG SAFETY



TECHNICAL DATASHEET

Mega Bag Safety and Use Instructions


- Attach Mega Bag adaptor to the valve, drop collar onto thread, screw closed. Then inflate bag.



- Once inflated, remove inflation adaptor, apply cap and screw tight.




- To deflate Mega Bag, remove cap, push centre of valve and turn clockwise 45°.
- When bag is deflated, return valve to original position, roll up and tie the bag with strap.

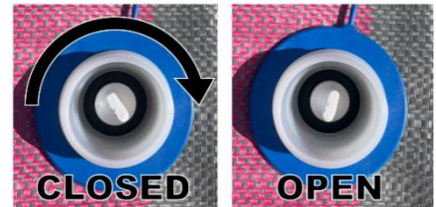


- Confirm safe and even inflation pressure in all bags.



Recommended Mega Bag Pattern:

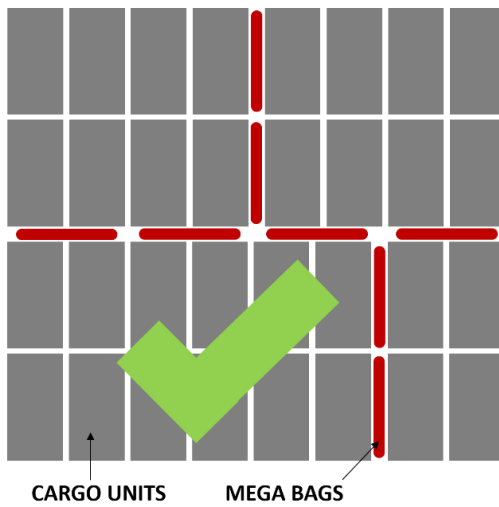

Do not bend or use double Mega Bags

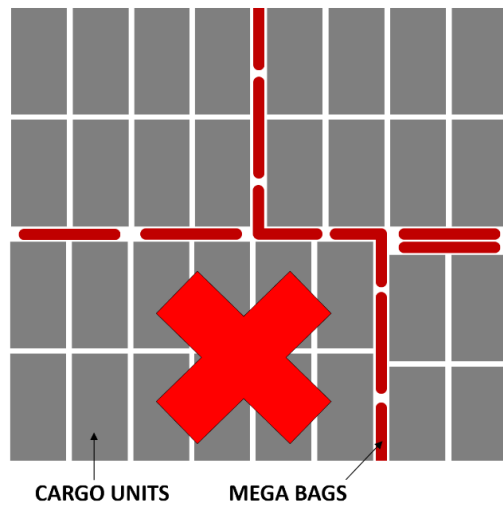

Checkmate Flexible Engineering Ltd

Unit 6, Pegasus Way, Bowerhill, Melksham, Wiltshire SN12 6TR, UK. Tel: +44 (0) 1225 705 465
email: sales@checkmateflex.com www.checkmateflex.com



www.checkmateflex.com

